





701 Decatur Avenue North, Suite 107 • Minneapolis, MN 55427 • +1-763-746-8034 • www.rjs1.com

Instructions to update the I-5000 firmware

1. Plug Ethernet cable into network and I-5000
2. Press and hold the <Print> button and then press the <Power> button on I-5000 for status screen and to see IP address
3. Open web browser and enter IP address for I-5000

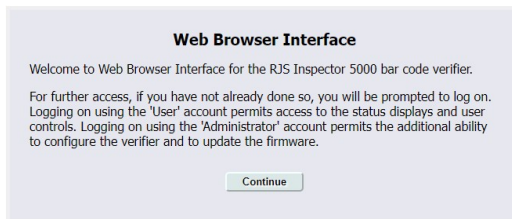

4. Enter the Username "Admin" and Password "Admin" to log into your I-5000
5. Select "Update" and then "Firmware"

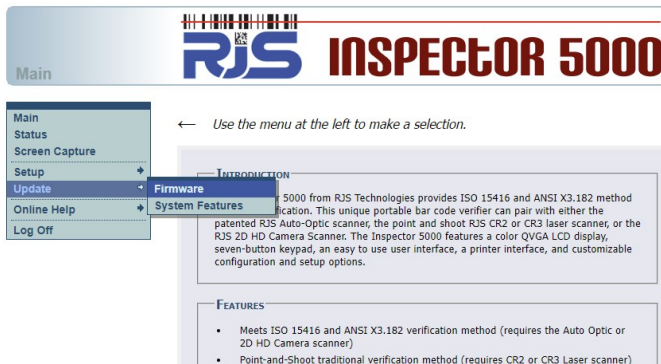



6. Select the new firmware file that was downloaded to your PC
7. Read the warning and click the checkbox
8. Click the “Update Firmware” button



9. The firmware will be loaded on to your bar code verifier
10. Once loaded, click the “Shutdown” button to finish the installation process

